

“L” Angle

The structural profile is designed to be placed as a beam support post and is generally used in structures located between floors, or mezzanines.

Standards and Specifications

CALIBER 22


SECTION	DIMENSION	TOLERANCE
Thickness	0.030 in	± 0.002 in
Galvanized	G - 60	≥ 0.60 oz/ft ²
L Length (Nominal)**	3.05 m	± 3 mm
A	70 mm	+ 1 mm
B	70 mm	+ 1 mm
T Thickness	0.030 in	± 0.001 in

** Special lengths available to special order, restrictions apply.

CALIBER 18

SECTION	DIMENSION	TOLERANCE
Thickness	0.048 in	± 0.002 in
Galvanized	G - 60	≥ 0.60 oz/ft ²
L Length (Nominal)**	3.05 m	± 3 mm
A	152 mm	+ 1 mm
	76 mm	
B	76 mm	+ 1 mm
T Thickness	0.048 in	+ 0.002 in

** Special lengths available to special order, restrictions apply.

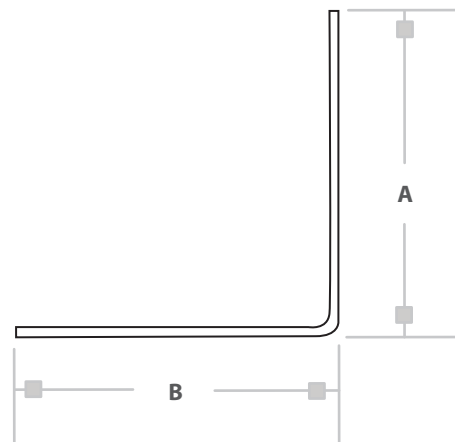

For more information contact us:

Customer Service USA
1 800 862 9022

Phone
+52 (81) 8345-0055

E-mail
contact.us@gpromax.com

Web Site
www.panelrey.com