

“U” Channel


This structural piece is designed to be placed in OMEGA-system structures, which, in architectural terms, are special structures, and are used to form two-sided saw horses or roofing assemblies.

Estándares y Especificaciones

CALIBER 20

SECTION	DIMENSION	TOLERANCE
Thickness	0.036 in	± 0.002 in
Galvanized	G - 60	≥ 0.60 oz/ft ²
L Length (Nominal)**	3.05 m / 3.96 m	± 2 mm
A Flank	48 mm	± 1 mm
B Width	43 mm	- 1 mm
T Thickness	0.036 in	± 0.002 in

* Internal dimension for channels. ** Special lengths available to special order; restrictions apply

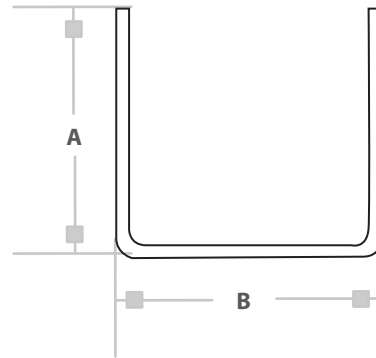

For more information contact us:

Customer Service USA
1 800 862 9022

Phone
+52 (81) 8345-0055

E-mail
contact.us@gpromax.com

Web Site
www.panelrey.com