


NON-Structural

Corner Bead

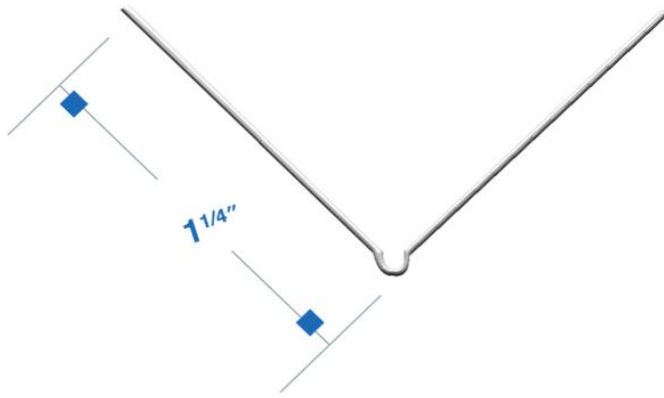

*Picture is reference only; it may differ from the actual product

It is used to protect the corners of gypsum board walls and all edges that are exposed to damage from blows (around doors, windows or niches) or any damage due to use.

Geometric properties

Panel Rey's corner bead is produced from hot-dip galvanized steel and has a standard G40 galvanized coating. It is manufactured with standard symmetrical sizes of 1 1/4".

Product Data

Length*:	10'	8'	6'
Pieces per bundle:	50	63	84
Total linear feet	500	504	504

*Consult your sales agent for special length measurements
 * Maximum pieces per pallet, amount could change per request.

Steel Thickness

Reference Gauge USA	KSI
30	33

ASTM Standards and Compliance Codes

All Panel Rey® Corner Bead meet or exceed the following ASTM and Construction standards:

- ASTM A653 *Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process*
- ASTM C1047 *Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base*
- ASTM A924/A924M *Standard Specification for General Requirements for Steel Sheet, Metallic-Coated by the Hot-Dip Process.*
- ASTM A1003 *Standard Specification for Steel Sheet, Carbon, Metallic- and Nonmetallic-Coated for Cold-Formed Framing Members*

LEED Credits

- **Leed v4 MR.** Raw Material Supply
- **Leed v4 MR.** Construction and Demolition Waste Management.
- **Leed v3 MR2.** Construction Waste Management. The steel used is 100% recyclable.
- **Leed v3 MR4.** Recycled Content. The steel used in the profiles has a minimum of:
 - Total recycled content: **46%**
 - Post-consumer recycled content: **37%**
 - Pre-Consumer recycled content: **9%**

Storage

Store in a dry place to protect from moisture.

Panel Rey México, S. A. has the authority to make changes to the information in this document without prior notice. It is not possible to keep all the regulations related to the system up to date, therefore, the user must know these rules. All claims must be in writing and supported by evidence; They must be sent within a period not exceeding 30 calendar days from the date the defect was discovered or should have been discovered and must be within the product warranty period. The client should not alter or repair the affected area until Panel Rey has reviewed the problem and determines the possible cause. The responsibility of Panel Rey México S. A. is limited only to the replacement of the defective material and is not responsible for incidental and unforeseen damages, direct or indirect, or any loss caused by the application of these products that does not conform to the instructions or the intended use, as well as the application of the product after the expiration date.

TDS-NS125CB30ga.V2025-1.0