

Flashing

This structural piece is designed to be placed on one of the wind braces of the OMEGA system across a frame.

A roll of galvanized steel to be formed as required in profile layers and drip rails or gutters.

Standards and Specifications

CALIBER 28


SECTION	DIMENSION	TOLERANCE
Thickness	0.015 in	± 0.001 in
Galvanized	G - 40	≥ 0.40 oz/ft ²
L Length (Nominal)**	6.1 m	± 2 mm
B	50.8 cm	± 1 mm
T Thickness	0.015 in	± 0.001 in

** Special lengths available to special order, restrictions apply.

CALIBER 26

SECTION	DIMENSION	TOLERANCE
Thickness	0.017 in	± 0.001 in
Galvanized	G - 40	≥ 0.40 oz/ft ²
L Length (Nominal)**	6.1 m	± 2 mm
B	50.8 cm	± 1 mm
T Thickness	0.017 in	± 0.001 in

** Special lengths available to special order, restrictions apply.

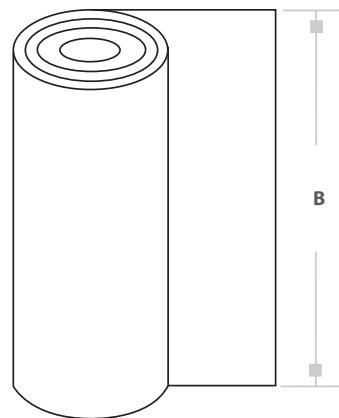

For more information contact us:

Customer Service USA
1 800 862 9022

Phone
+52 (81) 8345-0055

E-mail
contact.us@gpromax.com

Web Site
www.panelrey.com