

# Omega Post

This structural piece of the special structure systems, in architectural terms, is used to form two-sided saw horses or roofing assemblies.


## Standards and Specifications

CALIBER 20

SECTION	DIMENSION	TOLERANCE
Thickness	0.36 in	± 0.002 in
Galvanized	G - 60	≥ 0.06 oz/ft <sup>2</sup>
L Length (Nominal)**	2.44 m / 3.05 m	± 2 mm
A Flank	30 mm	± 1 mm
B Width*	41 mm	- 2 mm
C Lip	3 mm	1 mm
D	-	-
E	-	-
T Thickness	0.036 in	± 0.002 in

\* Dimensión externa para postes.

\*\* Longitudes especiales se realizan bajo pedido, aplican restricciones.

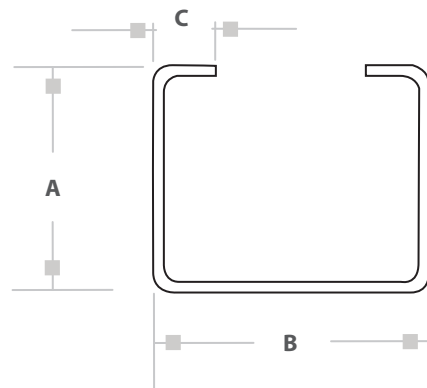

For more information contact us:

Customer Service USA

1 800 862 9022

Phone

+52 (81) 8345-0055

E-mail

contact.us@gpromax.com

Web Site

www.panelrey.com